

4VHS and 4VHSX

4" Non-Clog Wastewater Pumps
Standard (4VHS) and Explosion-Proof (4VHSX) Construction



4VHSX only

THE 4VHS AND 4VHSX (EXPLOSION-PROOF) SUBMERSIBLE WASTEWATER PUMPS ARE A HEAVY-DUTY 4" NON-CLOG SERIES CAPABLE OF PASSING A FULL 3" SPHERICAL SOLID. Myers single vane impeller prevents solids from binding or clogging and offer high operating efficiencies to cut your pumping costs. The 4VHS series modified constant velocity volute case provides smooth operation over an extended portion of the performance curve for longer seal and bearing life. For use in municipal lift stations, treatment plants and industrial waste applications. Myers offers a complete line of wastewater pumps, lift-out rail assemblies, controls and accessories to meet your needs. Call your Myers distributor, or the Myers Ohio sales office at 419-289-1144 for more details.

ADVANTAGES BY DESIGN

HIGH EFFICIENCY HYDRAULIC DESIGN CUTS PUMPING COSTS AND EXTENDS LIFE OF FLUID END COMPONENTS.

- Single vane impeller provides a steeper, non-overloading performance curve and handles 3" solids with ease.
- Modified constant velocity volute offers quiet operation, and low radial loads over extended portion of performance curve.

DURABLE MOTOR WILL DELIVER MANY YEARS OF RELIABLE SERVICE

- Oil-filled motor for maximum heat dissipation and constant bearing lubrication.
- Heat sensor thermostats imbedded in windings protect motor from over heat conditions.
- Seal leak probes warn of moisture entry; helps prevent costly motor burn-out.
- Double tandem shaft seals prevent sewage from entering motor.
- Power and control cables are double sealed with epoxy and compression grommet.

AVAILABLE WITH OPTIONAL U.L. APPROVAL FOR USE IN CLASS 1, GROUP D HAZARDOUS LOCATIONS (4VHSX ONLY).

PRODUCT CAPABILITIES

Capacities To	730 gpm	2,763 lpm
Heads To	90 ft.	27 m
Solids Handling	3 in.	76 mm
Liquids Handling	raw unscreened sewage, effluent, storm water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Winding Insulation Temp. (Class H)	356°F	180°C
Available Motors	1750 RPM, 7½ HP 230 volt, 1Ø, 60 Hz 220/230/460/575 volts 3Ø, 60 Hz 10 HP 200/230/460/575 volts 3Ø, 60 Hz	
Std. Third Party Approvals	CSA	
Optional Approvals	UL Class 1, Group D (4VHSX only)	
Acceptable pH Range	6 - 9	
Specific Gravity	.9 - 1.1	
Viscosity	28 - 35 SSU	
Discharge, Horizontal Flanged Centerline	4 in. 125 lb. ANSI	101.6 mm


NOTE: Consult factory for applications outside of these recommendations.

Construction Materials	
Motor Housing, Seal Housing, Cord Cap and Volute Case	cast iron, Class30 ASTM A48
Single Vane Impeller	ductile iron, Class 65 ASTM A536
Power and Control Cord	25 ft. SOOW
Mechanical Seals	double tandem, type 21
Standard	carbon and ceramic
Optional	lower tungsten, carbide
Pump, Motor Shaft	416 SST
Fasteners	300 Series SST
Volute Wear Ring	brass

WHERE INNOVATION MEETS TRADITION



Myers®

Pentair Water

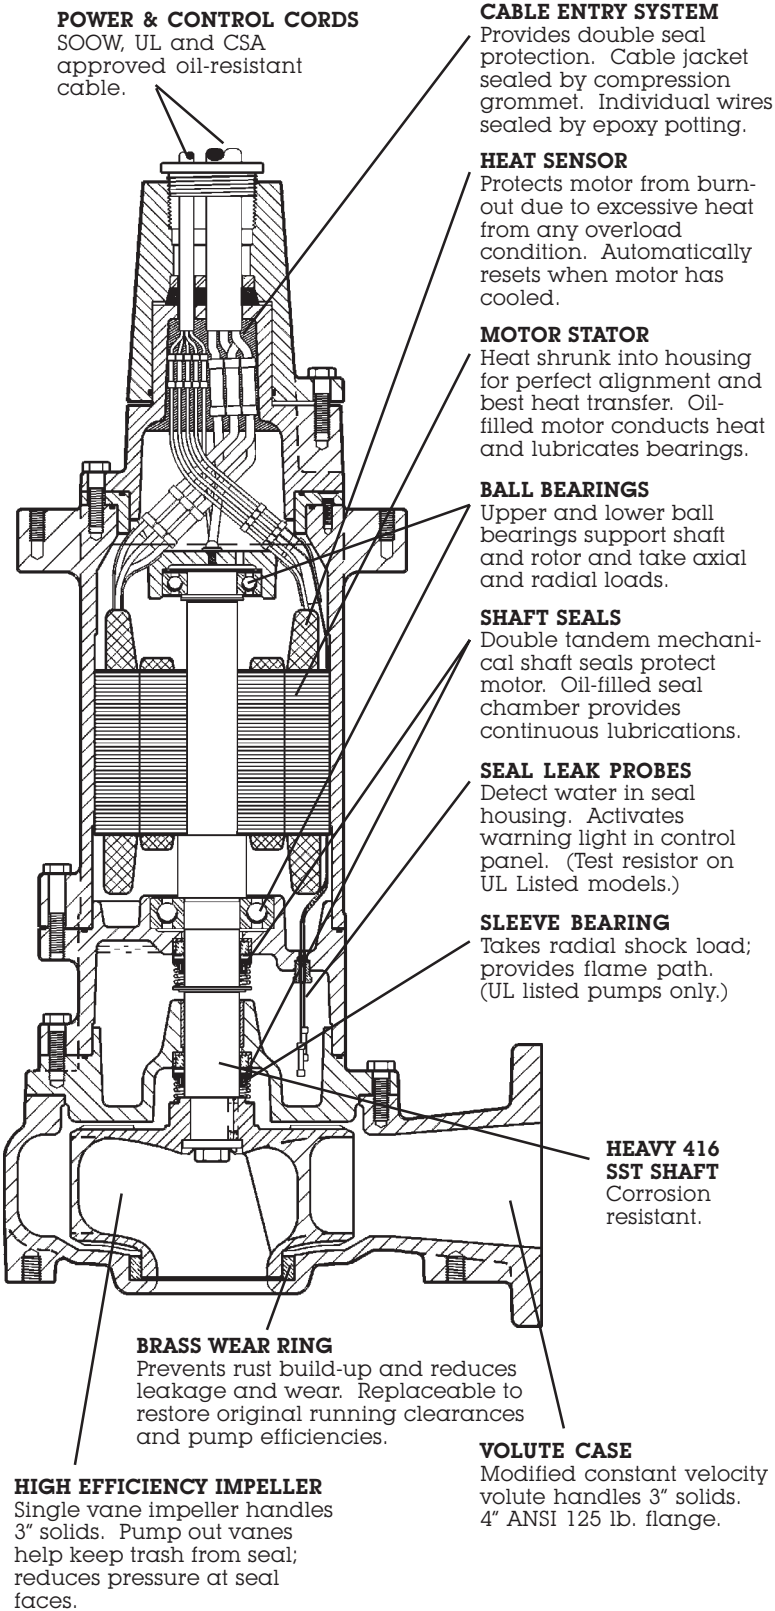


DIMENSIONS

[] dimensions in mm

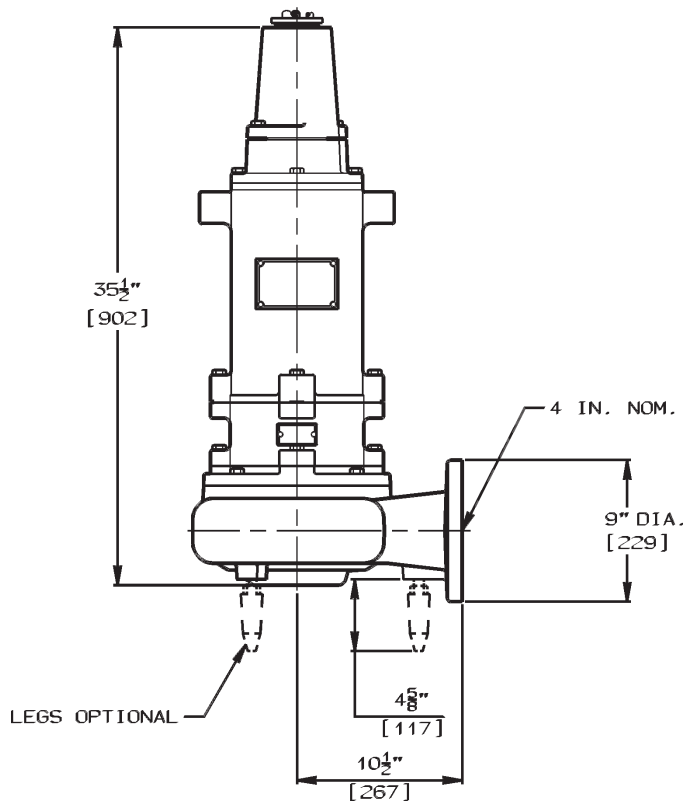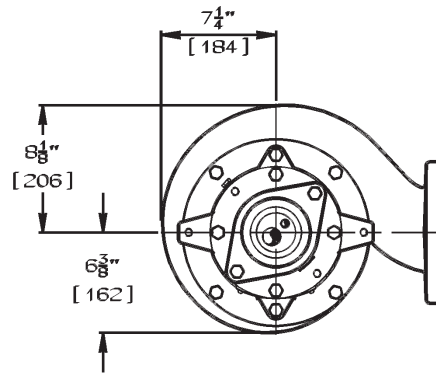

PUMP PERFORMANCE

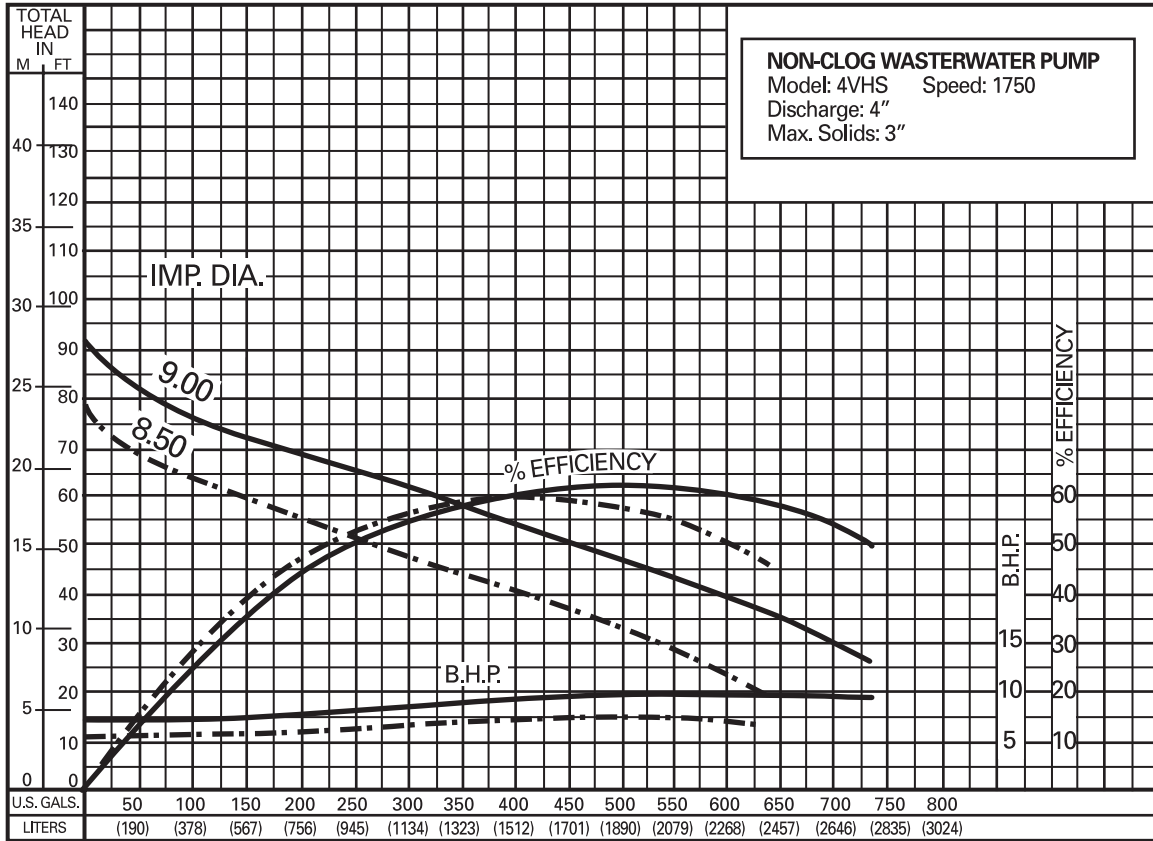

NOTE: Maximum impeller diameter for single phase pump is 8.5"

Available Models		Motor Electrical Data												
Standard	Explosion Proof	HP	Volts	Phase	Hz	Start Amps	Run Amps	Service Factor Amps	Run KW	Service Factor KW	Start KVA	Run KVA	NEC Code Letter	Service Factor
4VHS75M4-21	4VHSX75M4-21	7.5	230	1	60	137	34	40.8	8.3	10.4	31.5	7.4	D	1.2
4VHS75M4-03	4VHSX75M4-03	7.5	200	3	60	153	30	36.8	8.3	10.4	53	10	H	1.2
4VHS75M4-23	4VHSX75M4-23	7.5	230	3	60	133	26	32	8.3	10.4	53	10	H	1.2
4VHS75M4-43	4VHSX75M4-43	7.5	460	3	60	66	13	16	8.3	10.4	53	10	H	1.2
4VHS75M4-53	4VHSX75M4-53	7.5	575	3	60	53	10	12.8	8.3	10.4	53	10	H	1.2
4VHS100M4-03	4VHSX100M4-03	10	200	3	60	204	40	48.3	11.3	13.9	70.7	13.9	H	1.2
4VHS100M4-23	4VHSX100M4-23	10	230	3	60	178	35	42	11.3	13.9	70.7	13.9	H	1.2
4VHS100M4-43	4VHSX100M4-43	10	460	3	60	89	17.5	21	11.3	13.9	70.7	13.9	H	1.2
4VHS100M4-53	4VHSX100M4-53	10	575	3	60	71	14	16.8	11.3	13.9	70.7	13.9	H	1.2

Motor Efficiencies and Power Factor									
		Motor Efficiency %				Power Factor %			
HP	Phase	Service Factor Load	100% Load	75% Load	50% Load	Service Factor Load	100% Load	75% Load	50% Load
7.5	1	77	77	75	67	98	98	97	92
7.5	3	78	77	74	67.5	81.5	80	75.5	68
10	3	80	80	77	70.5	83	81.5	75.5	67

4VHS and 4VHSX

SPECIFICATIONS

PUMP MODEL - Pump shall be Myers Model Number 4VHS / 4VHSX _____ Non-Clog Submersible Pump with 1 _____ or 2 _____ vane enclosed impeller. All openings in pump impeller and volute case shall be large enough to pass a 3" diameter sphere. Discharge flange shall be four (4) inch standard. Pump and motor assembly shall be UL listed for Class 1, Group D explosion-proof service (4VHSX only).

OPERATING CONDITIONS - Pump shall have a capacity of _____ GPM at a total head of _____ feet and shall use a _____ HP motor operating at _____ RPM.

MOTOR - Pump motor shall be of the sealed submersible type rated _____ HP at _____ RPM 60 Hertz. Motor shall be for three phase 200 volts _____, 230 volts _____, 460 volts _____, or 575 volts _____. Motor shall be NEMA B type.

Stator winding shall be of the open type with Class H insulation good for 180°C (356°F) maximum operating temperature. Winding housing shall be filled with a clean high dielectric oil that lubricates bearings and seals and transfers heat from windings and rotor to outer shell. Air-filled motors which do not have the superior heat dissipating capabilities of oil-filled motors shall not be considered equal.

Motor shall have two heavy duty ball bearings to support pump shaft and take radial and thrust loads and a sleeve guide bushing directly above the lower seal to take radial load and act as flame path for seal chamber. Ball bearings shall be designed for 50,000 hours B-10 life. Stator shall be heat shrunk into motor housing.

A heat sensor thermostat shall be attached to and imbedded in the winding and be connected in series with the motor starter contractor coil to stop motor if temperature of winding is more than 120°C (248°F). Thermostat to reset automatically when motor cools to safe operating temperature. Three heat sensors to be used on 3 phase motors. The common pump, motor shaft shall be of 416 stainless steel.

SEALS - Motor shall be protected by two mechanical seals mounted in tandem with a seal chamber between the seals. Seal chamber shall be oil filled to lubricate seal face and to transmit heat from shaft to outer shell.

Seal face shall be carbon and ceramic and lapped to a flatness of one light band. Lower seal faces shall be _____ carbide (optional).

A double electrode shall be mounted in the seal chamber to detect any water entering the chamber through the lower seal. Water in the chamber shall cause a red light to turn on at the control box. This signal shall not stop motor but shall act as a warning only, indicating service is required.

IMPELLER - The impeller shall be cast ductile iron and of the 1 vane _____ or 2 vane _____ non-clog enclosed type. Vane inlet tip(s) shall be carefully rounded to prevent stringy material from catching in vane(s). Pump-out vane shall be used in front and back chamber. Impeller shall be dynamically balanced. Impeller shall be driven by stainless steel shaft key and impeller held in place with lock screw and washer. Impeller and motor shall lift off of case as a unit without disturbing discharge piping. Impeller neck shall run in bronze wear ring that is pressed into volute case.

PUMP CASE - The volute case shall be cast iron and have a flanged center line discharge. Discharge flange shall be 4" standard with bold holes straddling center line. A bronze wear ring shall be pressed into case for guiding impeller neck and to prevent corrosion freeze up. Wear ring shall be held from rotating by locking with stainless steel set screw in end of ring.

PUMP AND MOTOR CASTING - All castings shall be of high tensile cast iron and shall be treated with phosphate and chromate rinse. All fasteners shall be 302 stainless steel.

BEARING END CAP - Upper motor bearing cap shall be a separate casting for easy mounting and replacement.

POWER CABLES - Power cord and control cord shall be double sealed. The power and control conductor shall be single strand sealed with epoxy potting compound and then clamped in place with rubber seal bushing to seal outer jacket against leakage and to provide for strain pull. Cords shall withstand a pull of 300 pounds to meet U.L. requirements.

Insulation of power and control cords shall be type SOOW. Both control and power cords shall have a green carrier ground conductor that attaches to motor frame.